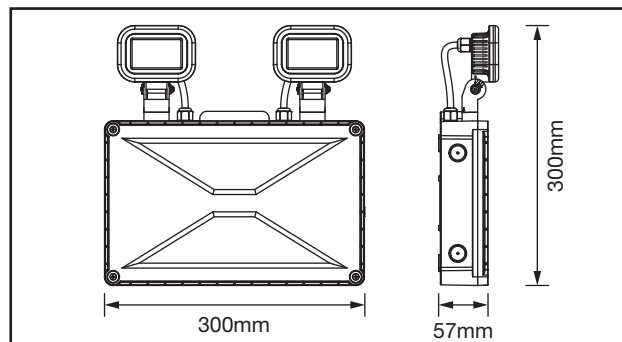


AEMTWIN/NM

2.5W Polycarbonate IP65 IK10
Non-Maintained Emergency
Twin Flood Light

SecureBright**PRODUCT FEATURES**

- Functions As A Non-Maintained Luminaire
- 20mm Conduit/Side Entries
- IK10 Vandal Resistant Design
- Loop In Loop Out Push Terminals For Easy Wiring
- IP65 Rated - Suitable For Internal & External Applications
- Marine Grade Tough Polycarbonate Construction - Suitable for Coastal Areas
- >3 Hours Of Continuous Light In Emergency Mode
- Suitable For Wall & Ceiling Mounting

**Scan For
Instructions****TECHNICAL SPECIFICATIONS**

Code	AEMTWIN/NM
Emergency Luminous Flux (LM)	≤360lm
CCT (Kelvin)	6500K
Beam Angle (°)	145°
SDCM	<6
CRI	>80
Peak Intensity (cd)	104cd
Operating Voltage (V)	220-240V AC
Emergency Output Power (W)	2.5W
Operating Power (W)	2W
Operating Current (A Max)	0.025A
Power Factor (Pf)	>0.3
Class	II
Body Material	Polycarbonate
Frame Colour	RAL9003
Switching Cycles	30,000
Ingress Protection	IP65
Impact Resistance Rating	IK10
Ambient Operating Temperature (°C)	0°C ~ +50°C
Input Frequency (Hz)	50/60Hz
Guarantee	5 Years
Lifetime (L70 B50)	60,000 Hrs
Charge Time	24 Hrs
Battery Type	LiFePO4
Battery Voltage	3.2V DC
Battery Current	3300mAh
Battery Wattage Hours	10.56Wh
Emergency Duration	3 Hrs

