



INSTALLATION GUIDE & USER MANUAL ASPEED308/BK



13 Place Speedlock308 and floodlight combination onto WISKA® COMBI® 308



14 Turn quick-lock nuts



15 Attach support screw to SpeedLock308



ENSURE POWER SUPPLY IS OFF WHEN HANDLING ANY ELECTRICAL EQUIPMENT.

**** DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY ****

Returns & Faulty Items

- If any problem is encountered during or after installation, please call ALL LED technical department to get the problem resolved as soon as possible.
- Please do not just return the item to the outlet you purchased it from, as you are only entitled to a replacement or refund after the unit has undergone testing and the unit has been confirmed as having a manufacturing defect/fault. Your statutory rights are not affected.
- The manufacturer will not be deemed liable or held responsible for any damages caused by faults or manufacturing defects that may be present in any of its products or the misuse or incorrect installation of this device.
- All installations must be carried out in accordance with this installation guide and user manual.
- All goods are supplied under the terms and conditions of ALL LED LTD, a copy of which may be obtained upon written request.



ATTENTION


**IF ANY PROBLEMS PERSIST, PLEASE CALL THE ALL LED
TECHNICAL DEPARTMENT FOR FURTHER ASSISTANCE.**

Environmental Protection Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.


The manufacturer will not be deemed liable or held responsible for any damages caused by faults or manufacturing defects that may be present in any of its products or the misuse or incorrect installation of this device. Your statutory rights are not affected.



Installation Instructions

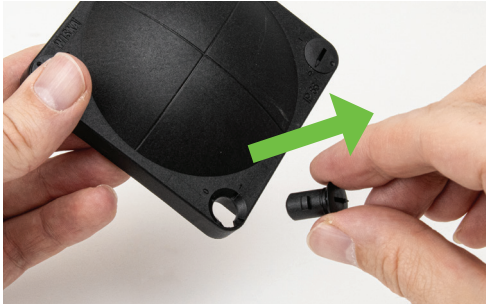


1 Take out locks on WISKA® COMBI® 308

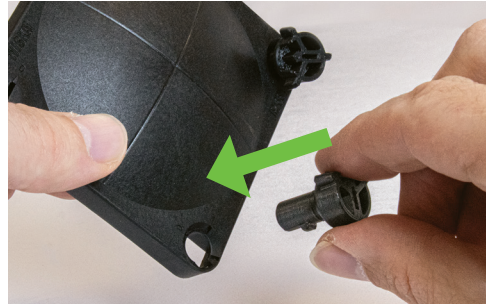


2 Put Speedlock308 quicklock nuts into WISKA® COMBI® 308 lid



7 Now it's time to go up the ladder

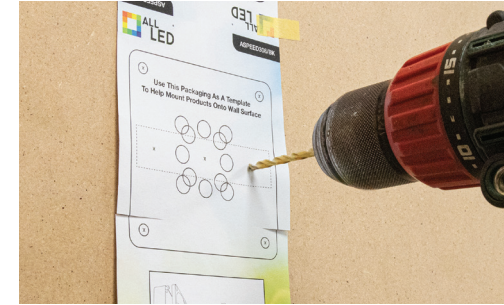

8 Use Speedlock308 packaging as template to mark and drill the wall

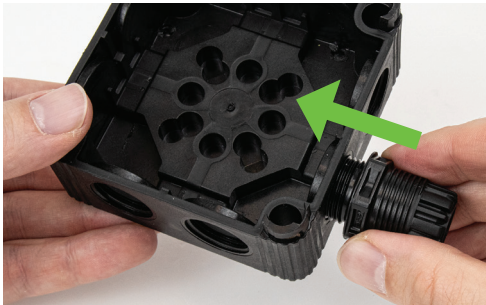


3 Put wire gland into WISKA® COMBI® 308




4 Attach floodlight onto SpeedLock308



9 Attach the WISKA® COMBI® 308 bracket to the wall

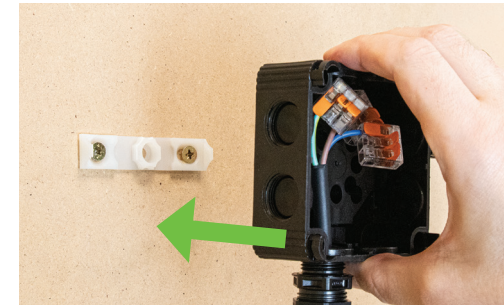


10 Attach WISKA® COMBI® 308 onto mounted wall bracket

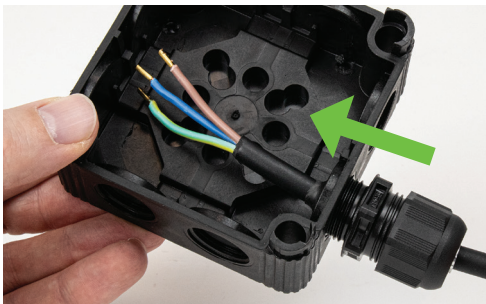


5 Put floodlight wires through gland



6 Attach connectors onto floodlight wiring

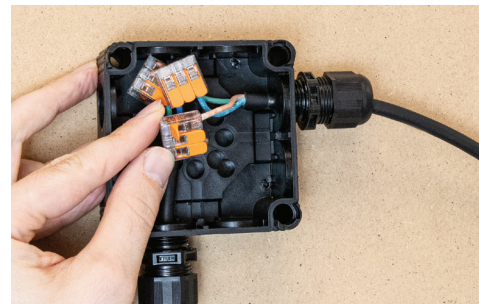

11 Join floodlight cable with mains electricity

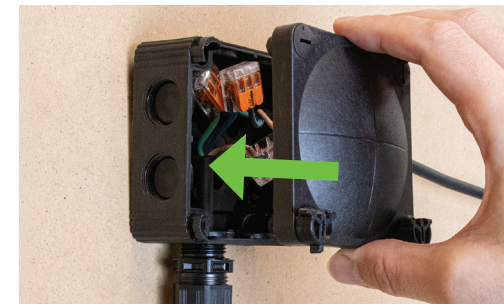

12 Connect WISKA® COMBI® 308 lid