

Upgrade
Jun. 2025

Doxa II

Standard exit sign with multiple mounting positions

Battery warranty 

- 7 mounting positions

Temp. Control 

- Integrated mounting clips
- Maintained or non-maintained operation
- 3 circuit track-mount version is available as separate model


 Standard Emergency

Standard With Temp. Control

Order Code	Mount Type	Input Power (max)	Emergency Output Power	CCT	Lumen
DOX20103	Surface & Recessed	3W	1W	6500K	30lm (Emergency) 50lm (Lighting)
DOX20103-C3	Track (4-wire,3-circuit)				


Self-test (Only)

Order Code	Mount Type	Input Power (max)	Emergency Output Power	CCT	Lumen
DOX20103/ST	Surface & Recessed	3W	1W	6500K	30lm (Emergency) 50lm (Lighting)
DOX20103-C3/ST	Track (4-wire,3-circuit)				

Battery

Order Code	Type	Capacity	Voltage
BATC18LFP1 (for standard)	LiFePO4	1800mAh	3.2V
BAT18LFP1 (for self-test)	LiFePO4	1800mAh	3.2V

- 5** 5 Years Product Warranty
- 2** 2 Years On-Site Warranty
- 1000V** Surge Protection

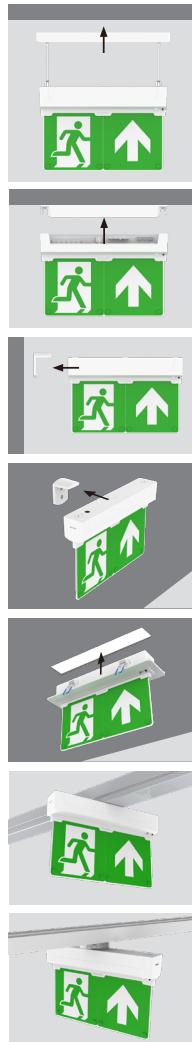

General Specification

Input Voltage	220-240Vac
Input Current (max)	50/60Hz 30mA
Lifetime	50,000h
Emergency Conversion Time	<1s
Emergency Operation Time	3h
Charging Time	24h
Ambient Temp	0°C to 50°C
Housing	Polycarbonate



Order Code

DOX20103
DOX20103-C3
DOX20103/ST
DOX20103-C3/ST

Dimensions

