

# Haldon

07090 HAD11C-GRY

## Haldon, circular outdoor LED wall light 11W 53°, Grey

- Die-cast aluminium body with polycarbonate diffuser
- Choices of circular and oval shapes
- Black and dark grey textured powder coat finishing
- Flicker free



### Overview

Kosnic Haldon wall light comes with integrated LEDs for an efficient energy saving solution. Constructed from die-cast aluminium with a polycarbonate diffuser and is IP54 rated for outdoor use. Available circular or oval with a black or grey finish, offering a simple and elegant solution wherever outdoor wall lighting is required.



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK05
IP Rating	IP54
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

### Technical Summary

Product Code	HAD11C-GRY
Input Voltage Supply	110-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	13.5A / 142µs
Default Power	11 W
Power Factor	0.9
Default CCT	4,000 K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	70%
Lumens Output Maximum	750 lm
Maximum Efficiency	69 lm/W
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	27,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.54Kg
Dimensions (L x W x D) (mm)	82.5xØ190
Beam Angle - Lumi (°)	53
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com


Kosnic.com



07090 HAD11C-GRY

## Overview

Kosnic Haldon wall light comes with integrated LEDs for an efficient energy saving solution. Constructed from die-cast aluminium with a polycarbonate diffuser and is IP54 rated for outdoor use. Available circular or oval with a black or grey finish, offering a simple and elegant solution wherever outdoor wall lighting is required.

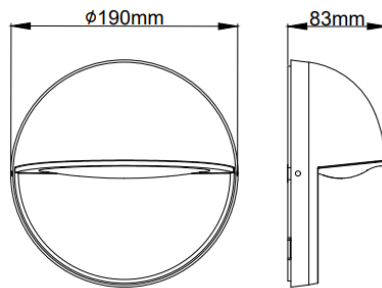

HAD11C



**IP54**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK05
IP Rating	IP54
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

