

Upgrade
Jun. 2025

Kalem II

Standard LED panel exit sign box

Battery warranty 


• Slim profile LED panel

• Uniform back light

• Edge lit

Temp. Control 

- Hidden slot on the frame for attaching the exit sign sheet
- Maintained and non-maintained option

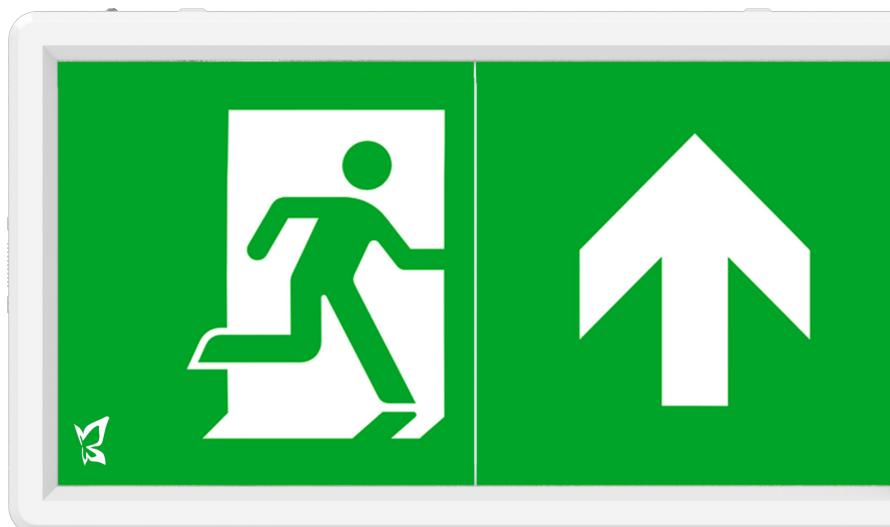

▲ Rotatable arrow sign 

5 **5 Years**
Product Warranty

2 **2 Years**
On-Site Warranty

2000V
Surge Protection
(L to GND)



Under lights

General Specification


Input Voltage	220-240Vac
Conversion Time	<1s
Emergency Operation Time	3h
Charging Time	24h
Ambient Temp	0°C to 50°C
Housing	Polycarbonate

Installation
Fault WarningStandard
Emergency

Order Code

KAL201

Dimensions



Order Code	Input Power (max)	Emergency Output Power	CCT	Lumen
KAL201	5W	1.5W	6500K	80lm

Battery

Order Code	Type	Capacity	Voltage
BATS18LFP1	LiFePO4	1800mAh	3.2V