


Niva III Hinged LED Batten

CCT & Wattage Switchable LED Batten in 4ft, 5ft & 6ft

Push-release hinged LED tray




Wattage switches

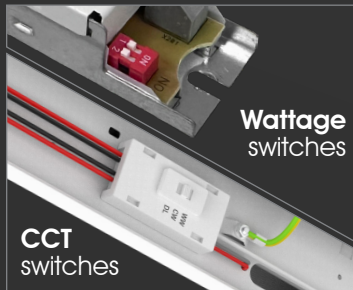

CCT switches

PHILIPS
CertaDrive
LED driver

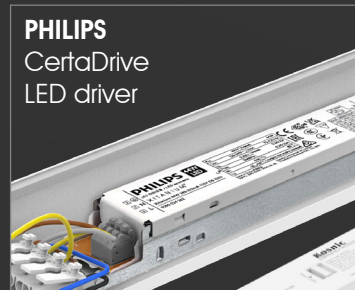

Plug-in Emergency Module with built-in battery


1. Open the lid at the top of the EM module and connect the battery
2. Place the EM module between the locking clips, rotate the clips to lock the EM module in place.
3. Plug to the prewired connectors

Wattage switchable

Niva III Single output	Niva III Twin output	Niva III Sensor Dim Twin output	Niva Go Single output	Niva Go Twin output
4ft: 12W/14W/16W/18W (up to 155lm/W)	2ft: 9W/11W/13W/15W (up to 150lm/W)	4ft: 17W/20W/24W/27W (up to 153lm/W)	4ft: 12W/14W/16W/18W (up to 155lm/W)	4ft: 17W/20W/24W/27W (up to 153lm/W)
5ft: 17W/20W/24W/27W (up to 154lm/W)	4ft: 17W/20W/24W/27W (up to 153lm/W)	5ft: 25W/30W/35W/44W (up to 156lm/W)	5ft: 17W/20W/24W/27W (up to 154lm/W)	5ft: 25W/30W/35W/44W (up to 156lm/W)
6ft: 20W/25W/30W/36W (up to 153lm/W)	5ft: 25W/30W/35W/44W (up to 156lm/W)	6ft: 35W/45W/53W/63W (up to 154lm/W)	6ft: 20W/25W/30W/36W (up to 153lm/W)	6ft: 35W/45W/53W/63W (up to 154lm/W)

Niva III sensor with corridor function

Dusk-to-dawn with Corridor Function

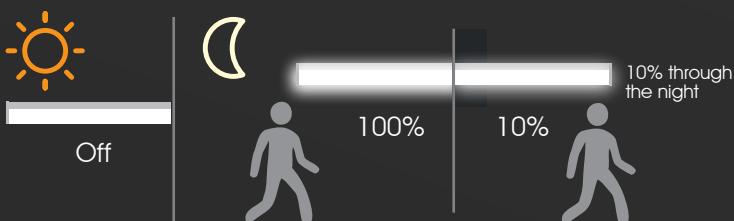

Universal Remote



	Detection Area			Hold Time		Daylight Sensor	Stand-by DIM level		Stand-by period		
ON	1		Radius	2	3	4		5		6	
	-	100%	Around 3m	-	-	5S	-	Disable	-	0%	
			-	ON	1min						
	ON	50%	Around 1.5m	ON	-	3min					ON
			ON	ON	10min						

Niva Go | Fixed CCT 4000K

This simple range of hinged LED batten has fix CCT & wattage. it includes 4ft, 5ft and 6ft length with single and twin output options.

it is also prewired to take the new Plug-in emergency module.


7 7 Years
Product Warranty

2 2 Years
On-Site Warranty


2000V
Surge Protection
(L to GND)

DALI & PUSH
Dimming

CCT Switch




Wattage Switch



Recommended



Batten UEM ⇨ P73

Toco
(Mounting height ≤ 6m)
⇨ P28Uni-Remote
RMT-UNI

General Specification

Voltage 220-240Vac
50/60Hz
CRI >80
SDCM 6
L80B10 Lifetime 114000h
Power Factor 0.90
Ambient Temp -20°C to 50°C
Housing Powder coated
sheet steel+PC



Niva III

Upgrade
May, 2025

Wattage and CCT switchable interior LED batten

- High efficiency up to 156lm/W
- Switchable wattage and CCT (3000/4000/6000K)
- Optional plug-in PIR ON/OFF sensor compatible with Uni-Remote
- Optional plug-in emergency modules, available in standard, self-test and DALI
- DALI-2 DT 6, DSI, switchDIM, corridor FUNCTION V2 option available
- For single and twin tube batten replacement
- 20mm Conduit entry
- BESA box fitting points
- Easy installation with press and release end caps to open the cover

S Plug-in ON/OFF sensor

E Plug-in emergency

CCT CCT switching

Watt Wattage switching

ECO Modular design


ECO Ultra-high efficiency

Uni-Remote Uni-Remote Compatible

Up to
156 $\frac{\text{lm}}{\text{W}}$

Driver TRIDONIC

DALI-2 TRIDONIC



Plug-in EME

Single Output (with light output of single T8 batten)

Order Code	Default Power	Alternative Power	Length	CCT	Lumen	
NIV4FS18	-	12W	4ft	Switchable*	1730lm	(3000K)
					1870lm	(4000K)
					1730lm	(6000K)
	-	14W			2020lm	(3000K)
					2180lm	(4000K)
					2020lm	(6000K)
	-	16W			2310lm	(3000K)
					2490lm	(4000K)
					2310lm	(6000K)
	18W	-			2600lm	(3000K)
					2800lm	(4000K)
					2600lm	(6000K)

Order Code	Default Power	Alternative Power	Length	CCT	Lumen
NIV5FS27	-	17W	5ft	Switchable*	2410lm (3000K)
	-	20W			2620lm (4000K)
	-	24W			2410lm (6000K)
	-	27W			2840lm (3000K)
	-	27W			3060lm (4000K)
	-	27W			2840lm (6000K)
	-	27W			3380lm (3000K)
	-	27W			3650lm (4000K)
	-	27W			3380lm (6000K)
	-	27W			3800lm (3000K)
	-	27W			4100lm (4000K)
	-	27W			3800lm (6000K)
NIV6FS36	-	20W	6ft	Switchable*	2820lm (3000K)
	-	25W			3060lm (4000K)
	-	30W			2820lm (6000K)
	-	36W			3500lm (3000K)
	-	36W			3780lm (4000K)
	-	36W			3500lm (6000K)
	-	36W			4170lm (3000K)
	-	36W			4500lm (4000K)
	-	36W			4170lm (6000K)
	-	36W			5000lm (3000K)
	-	36W			5400lm (4000K)
	-	36W			5000lm (6000K)

Twin Output (with light output of twin T8 batten)

Order Code	Default Power	Alternative Power	Length	CCT	Lumen
NIV2FT15	-	9W	2ft	Switchable*	1260lm (3000K)
	-	11W			1350lm (4000K)
	-	13W			1260lm (6000K)
	-	15W			1540lm (3000K)
	-	15W			1650lm (4000K)
	-	15W			1540lm (6000K)
	-	15W			1820lm (3000K)
	-	15W			1950lm (4000K)
	-	15W			1820lm (6000K)
	-	15W			2100lm (3000K)
	-	15W			2250lm (4000K)
	-	15W			2100lm (6000K)
NIV4FT27	-	17W	4ft	Switchable*	2400lm (3000K)
	-	20W			2600lm (4000K)
	-	24W			2400lm (6000K)
	-	27W			2800lm (3000K)
	-	27W			3000lm (4000K)
	-	27W			2800lm (6000K)
	-	27W			3400lm (3000K)
	-	27W			3600lm (4000K)
	-	27W			3400lm (6000K)
	-	27W			3700lm (3000K)
	-	27W			4100lm (4000K)
	-	27W			3700lm (6000K)
NIV5FT44	-	25W	5ft	Switchable*	3700lm (3000K)
	-	30W			3900lm (4000K)
	-	35W			3700lm (6000K)
	-	44W			4200lm (3000K)
	-	44W			4500lm (4000K)
	-	44W			4200lm (6000K)
	-	44W			4900lm (3000K)
	-	44W			5200lm (4000K)
	-	44W			4900lm (6000K)
	-	44W			5900lm (3000K)
	-	44W			6400lm (4000K)
	-	44W			5900lm (6000K)
NIV6FT63	-	35W	6ft	Switchable*	5000lm (3000K)
	-	45W			5400lm (4000K)
	-	53W			5000lm (6000K)
	-	63W			6300lm (3000K)
	-	63W			6700lm (4000K)
	-	63W			6300lm (6000K)
	-	63W			7400lm (3000K)
	-	63W			7900lm (4000K)
	-	63W			7400lm (6000K)
	-	63W			8400lm (3000K)
	-	63W			9200lm (4000K)
	-	63W			8400lm (6000K)

* When CCT switchable, colour temperature switches between 3000K, 4000K & 6000K

DALI

Suffix	Description
/DA	DALI & PUSH dimming for NIV2FT15, NIV4FT27, NIV5FT44, NIV6FT63

Optional Gears

Type	Order Code	Description
Emergency module*	BEM303	Standard Batten UEM, 3W, LiFePO4 battery
Emergency module*	BEM303/SST	Standard & Self-test 2 in 1 Batten UEM, 3W, LiFePO4 battery
DALI-2 emergency module*	BEM303/DA	DALI-2 Batten UEM, 3W, LiFePO4 battery
Microwave Sensor**	NIV-MWS	Plug-in ON/OFF microwave sensor
PIR Sensor**	TOC-P	Side-mount PIR sensor

* Emergency module is not compatible with NIV2FT15/DA

** Sensor is not compatible with DALI version

Accessories

Type	Order Code	Description
Suspension Kit	SUS-BTN04	4 wires included, maximum 1.0m drop
Suspension Kit	SUS-BTN04/25	4 wires included, maximum 2.5m drop
Remote Control	RMT-UNI	Universal Remote Control

Order Code

NIV4FS18

NIV5FS27

NIV6FS36

NIV2FT15
NIV2FT15/DA

NIV4FT27
NIV4FT27/DA

NIV5FT44
NIV5FT44/DA

NIV6FT63
NIV6FT63/DA

Dimensions