

5 5 Years
Product Warranty


Lulu Upgrade
May, 2025

Plug-in microwave motion and daylight sensor

Recommended product



Polo II	↪ P163
Ossa III	↪ P166
Pico II	↪ P168
Ida	↪ P172
Blanca-DD	↪ P175
Ogo	↪ P177
Meola II	↪ P179
Viso II	↪ P182
Etna	↪ P185
Kennet III	↪ P213
Kennet Pro	↪ P217
DD II	↪ P413



Uni-Remote
RMT-UNI


General Specification

Voltage	12Vdc
Detection angle	150°
Transmitting power	≤0.5mW
Operation Temp	-25°C to 60°C



Order Code
LUL-M/D


Dimensions

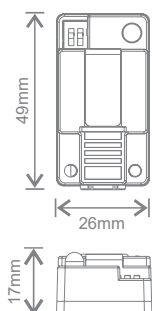


- Optional corridor function
- Powered by low voltage 12V DC
- PWM (5V DC) control output
- Mounting height up to 6m
- Super compact design
- Sensor setting with DIP switch
- Easy install on a wide range of Kosnic products including selected integrated bulkheads and linear luminaires
- It can be configured with Uni-Remote
- Full sensor features available when using the RMT-UNI (Hold Time, Daylight Threshold, Stand-by Period, Stand-by Dim Level, Detection Area, Dim Up, Dim Down, Brightness)



Uni-Remote Compatible

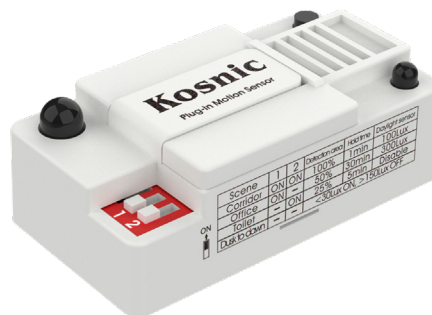

Detection Range



Detection area	Detection radius
	Walking speed: 1m/s
	H: 6m H: 3m
100%	2m 5m
75%	1m 3.5m
50%	0.5m 2.5m
25%	- 1m

			Detection area	Hold time	Daylight Sensor
Scene	1	2	↔	☀	☀
Corridor	ON	ON	100 %	1min	100Lux
Office	ON	—	50 %	30min	300Lux
Toilet	—	ON	25 %	5min	Disable
Dusk to dawn	—	—	<30Lux ON, >150Lux OFF		



Order Code	Installation Height	Control Output
LUL-M/D (RMW-DC)	6m	ON/OFF, Dimming (PWM)

Accessory

Order Code	Description
RMT-UNI	Universal Remote Control