

5 5 Years
Product Warranty

2000V
Surge Protection
(L to GND)



General Specification


Voltage 220-240Vac
50/60Hz
CRI >80
SDCM <6
L80B10 Lifetime 105000h
Power Factor >0.90
Ambient Temp -20°C to 50°C
Housing Die-cast aluminium + Glass



Order Code

VEN10-SCT
VEN20-SCT
VEN30-SCT
VEN50-SCT

Dimensions

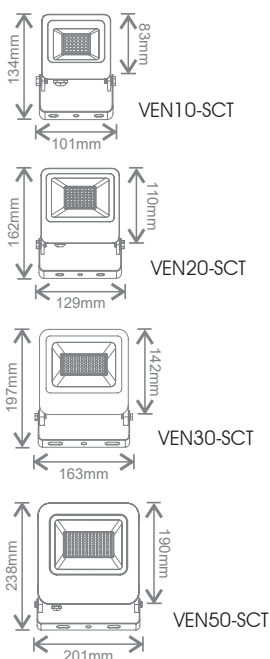

Ventas II

LED flood light

- Switchable CCT (3000/4000/6500K) with remote control included
- Die-cast aluminium body
- Surge protection
- Slim profile
- 1m of H05RN-F 3 x 1mm² cable


CCT CCT switching

Wildlife friendly*

*CCT of 3000K



Remote control
(included)



Angled bracket for easy installation

Order Code	Power	Beam Angle	Finish	CCT	Lumen
VEN10-SCT	10W	105°	Grey	Switchable*	590lm (3000K) 660lm (4000K) 590lm (6500K)
VEN20-SCT	20W	105°	Grey	Switchable*	1410lm (3000K) 1680lm (4000K) 1410lm (6500K)
VEN30-SCT	30W	105°	Grey	Switchable*	2340lm (3000K) 2800lm (4000K) 2340lm (6500K)
VEN50-SCT	50W	105°	Grey	Switchable*	3980lm (3000K) 4980lm (4000K) 3980lm (6500K)

* When CCT switchable, colour temperature switches between 3000K, 4000K & 6500K

Accessory

Type	Order Code	Description
Connector	KCWP3IN	IP67 In-line Connector