

4 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only




Batten UEM

07872 BEM303

Batten UEM 3W emergency module for battens

- For Kosnic LED battens, where specified on the batten datasheet
- Designed for easy installation
- For maintained or non-maintained emergency lighting systems
- 3 hours rated duration
- LiFePO4 battery for improved lifespan allowing frequent partial discharge without capacity reduction
- Easy battery replacement
- Patented adaptive current control
- Suitable for LED loads with forward voltage between 30-300Vdc



Overview

The Emergency Module for LED

Batten Luminaires has been

designed for easy installation in a

range of Kosnic LED batten

luminaires. The emergency module

will adjust the output within the

module's limits to the level required

to operate the luminaire and ensure

an operation time of three hours.

The battery is replaceable.



IP20



General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

Compliance

LVD	EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	RoHS, WEEE, Ecodesign 2009/125/EC

Technical Summary

Product Code	BEM303
Weight	0.18Kg
Dimensions (L x W x D) (mm)	221x43x26
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 45°C
UEM/EME Maximum Working Voltage (Vdc)	310 V
UEM/EME Test Function	Manual
UEM/EME Protection	Class II
UEM/EME Weight	0.23 kg
UEM/EME Battery Output Wattage (max)	3 W
UEM/EME Dimensions (L x W x D) (mm)	221x43x26

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

4 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Batten UEM



07872 BEM303

Accessories

Product Code	Description	Type
BAT18LFP2	Battery for BEM303	Battery

Overview

The Emergency Module for LED

Batten Luminaires has been

designed for easy installation in a

range of Kosnic LED batten

luminaires. The emergency module


will adjust the output within the

module's limits to the level required

to operate the luminaire and ensure

an operation time of three hours.

The battery is replaceable.

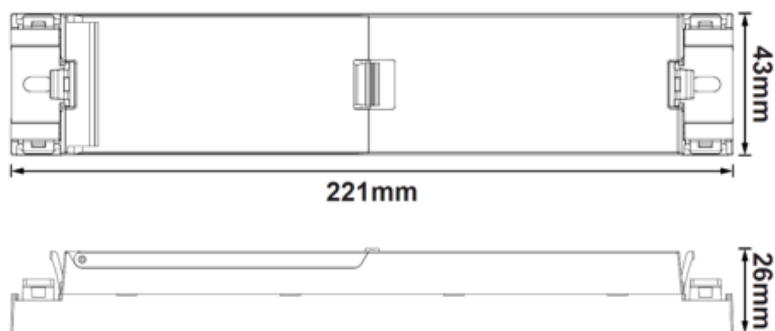


IP20



General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

Wiring Diagram

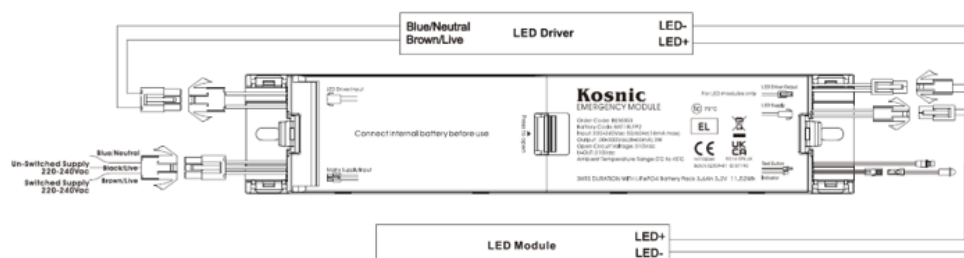

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK