

Reon GU10 (Dim)

07715 RE05D-GUF40

Reon 5W Dimmable GU10 60° 4000K

- Save energy by up to 90%
- Long life of 25,000h
- Replacement for halogen GU10 lamps

Overview

The REON LED dimmable lamps are uncompromising replacements for halogen GU10 lamps. The unique LED lens and Chip On Board technology deliver the same ambience as halogen, while delivering huge energy savings over halogen lamps without compromising on brightness.



General Information

Ambient Temperature	-20°C to 40°C
Range (°C)	
Installation Area	Internal
L80B10	12,000 h
Lifetime (h) @Ta 25 °C	



Compliance

LVD	EN 62493:2015+A1:2022, EN 62560:2012+A11:2019
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023

Technical Summary

Product Code	RE05D-GUF40
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	0.7A/600us
Default Power	5 W
Power Factor	0.9
Default CCT	4,000 K
SDCM of CCT	<6
CRI	80
Dimmable	Y
Flicker	<1%
Lumens Output Maximum	520 lm
Maximum Efficiency	104 lm/W
L70B50 Lifetime (h) @Ta 25 °C	25,000 h
L80B10 Lifetime (h) @Ta 25 °C	12,000 h
L90B10 Lifetime (h) @Ta 25 °C	6,000 h
Nominal Lifetime (h)	25,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.036Kg
Dimensions (L x W x D) (mm)	56xØ50
Beam Angle - Lumi (°)	60

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Reon GU10 (Dim)

07715 RE05D-GUF40


Overview

The REON LED dimmable lamps are uncompromising replacements for halogen GU10 lamps. The unique LED lens and Chip On Board technology deliver the same ambience as halogen, while delivering huge energy savings over halogen lamps without compromising on brightness.



General Information

Ambient	-20°C to 40°C
Temperature Range (°C)	
Nominal Lifetime (h)	25,000 h
Installation Area	Internal

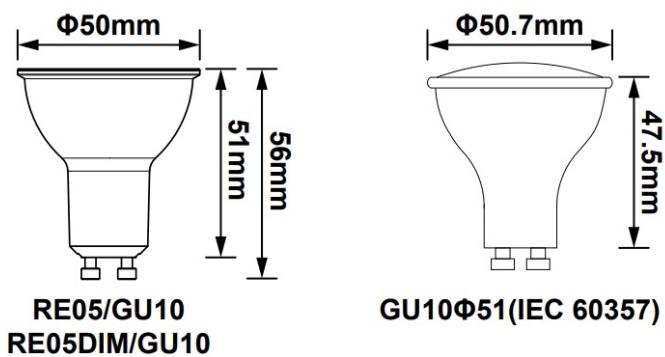

**RE05/GU10
RE05DIM/GU10**

GU10Φ51(IEC 60357)

Dimming Compatibility

It is important to appreciate that not all dimmer switches will provide effective, smooth and flicker free dimming. The operation of common mains voltage AC dimmers appears similar but the electrical characteristics vary significantly. While this makes no difference to filament lamps, the effect on the electronics within the LED lamp can be dramatic and are often incompatible. Please note that all information in this guide is based on testing under laboratory conditions and should be used as guidance only. Because of the complicated application environment, the huge variation in dimmer construction from one model to another it is not possible to guarantee that a lamp will work with a dimmer and undesirable effects could be observed even with recommended dimmer switches. In extreme cases incompatible dimmer switches may damage the lamps. **Please ensure that the set-up is tested for performance before committing to a large project.**

Recommended Dimmer Switches:

Manufacturer	Model	Marked Rating	Notes
Varilight	V.Dim	400W	1 to 20 lamps. Approximately 80% dimming.
Varilight	LEDlite Low Load	120W	1 to 20 lamps. Approximately 85% dimming.
Hamilton	L400/2 (N4002)	400W	1 to 20 lamps. Approximately 80% dimming.
Richmond/Zano	ZGRID500	50W LED	1 to 20 lamps. Approximately 75% dimming.
Varilight	V.Dro	100W LED	1 to 20 lamps. Approximately 90% dimming.
Aurora	AU-DSP400X	400W	1 to 20 lamps. Approximately 90% dimming.
Hamilton	H-GDM400W	400W	1 to 20 lamps. Approximately 80% dimming.
BG	DM400AP	5-50W LED	1 to 20 lamps. Approximately 85% dimming.
Zano	ZGRIDLED	250W LED	1 to 20 lamps. Approximately 85% dimming.
Robus	LOADPRO RLA2000DT-01	133W LED	1 to 20 lamps. Approximately 90% dimming.
MK	K1523*LV (Logic Plus)	4-70W LED	1 to 20 lamps. Approximately 80% dimming.
Hamilton	LEDITB	5-100W LED	1 to 20 lamps. Approximately 90% dimming.
Hamilton	H-LEDSTAT-GR	5-100W LED	1 to 20 lamps. Approximately 90% dimming.
LAP	H0025/B-SF	5-150W	1 to 20 lamps. Approximately 90% dimming.
Crabtree	SFCR1125/LED SFCR1225/LED	5-100W	1 to 20 lamps. Approximately 90% dimming.
Danlers	DQDDG M1	400W	1 to 20 lamps. Approximately 85% dimming.
CYANIRIS	CYDIMRFT1 (Remote)	2 x 288W	1 to 20 lamps. Approximately 85% dimming.
MK	MB1523WHI	6-100W	1 to 20 lamps. Approximately 85% dimming.

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com